


linea pasta lunga

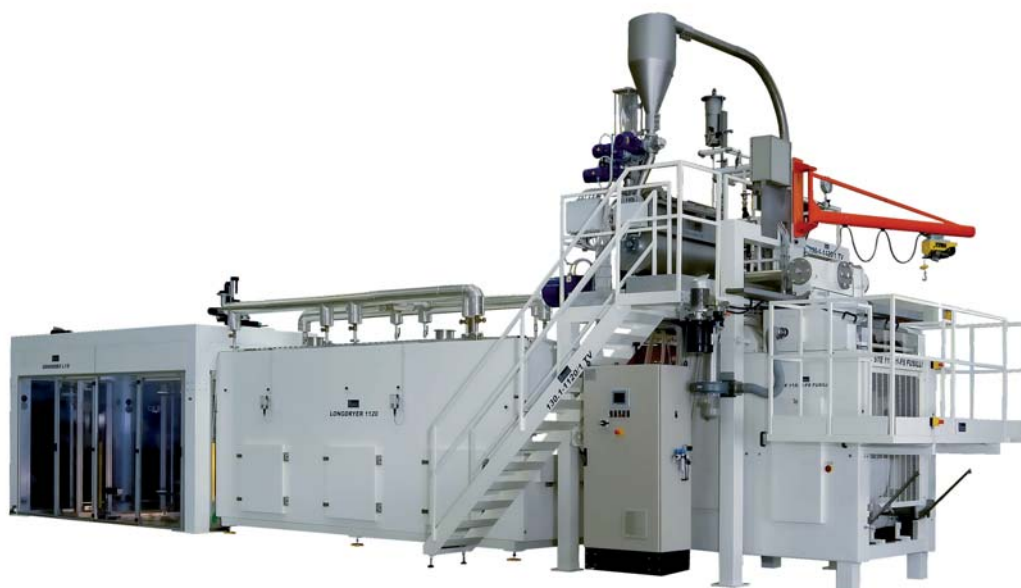

Con produzioni da 150 a 500 kg/h la linea LONGPASTALINE può realizzare, secondo la configurazione, pasta lunga di qualsiasi formato incluse candele, ziti e fusilli bucati lunghi. La preparazione impasto con la pre - impastatrice PREMIX® e la tecnologia a vuoto totale della vasca, garantiscono un ottimo colore naturale alla pasta, mentre lo speciale profilo della vite di compressione minimizza il riscaldamento dell'impasto, garantendone una migliore qualità ed una ottimizzazione del consumo energetico. La fase lunga di pre-incarto (45 minuti circa) assicura un'adeguata preparazione del prodotto alla successiva fase di essiccazione. Anche LONGPASTALINE può essere dotata del sistema automatico di fine linea OMNIROBO.

With outputs ranging from 150 to 500 kg/h, the LONGPASTALINE can make, depending on its configuration, long-cut pasta of any shape including candele (candles), ziti (hollow tubes) and fusilli bucati lunghi (long tubular spirals). The preparation of the dough with the PREMIX® pre-kneading machine and the absolute vacuum technology of the dough tank, guarantee an excellent natural color to the pasta, while the special profile of the compression screw minimizes the heating of the dough, thereby guaranteeing better quality and energy savings. The long pre-drying cycle (approx. 45 minutes) duly prepares the product for the next drying phase. The LONGPASTALINE may also be equipped with an automatic end-of-line system OMNIROBO.

tipo linea	pasta lunga std spaghetti Ø 1,7	pasta lunga spec. fusillo bucato lungo	pasta lunga spec. candele / zitoni	AxBxH	AxDxH
line type	std long pasta spaghetti Ø 1,7	spec. long pasta fusillo bucato lungo	spec. long pasta candele / zitoni		
	(kg/h)	(kg/h)	(kg/h)	(mm)	(mm)
70.1.580/1	125	/	/	2800x2700x4100	/
90.1.580/1	190	/	/	2800x2700x4100	/
105.1.1120/1	260	/	/	3700x9100x4800	3700x13500x4800
130.1.1120/1	400	120 ¹ -170 ²	180 ¹	4050x10200x5300	4050x15000x5300
135.1.1500/1	500	160 ¹ -225 ²	240 ¹	4050x10200x5300	4200x15000x5300


· Nota: Tutte le capacità orarie sono riferite a prodotto secco
 · ¹ Produzione oraria con vite speciale
 · ² Produzione oraria con vite speciale e trafila a n° 4 file di inserti

· Con Trafille al bronzo si possono avere riduzioni di produttività
 · A=Largh B=Lungh D=Lungh con Imp. Automatico H=Altezza

· Note: All the hourly capacities refer to dry product
 · ¹ Hourly output with special screw
 · ² Hourly output with special screw and die with 4 rows of inserts

· Output may be reduced with bronze dies
 · A=Width B=Length D=Length with Stacker Automatic H=Height

long pasta line

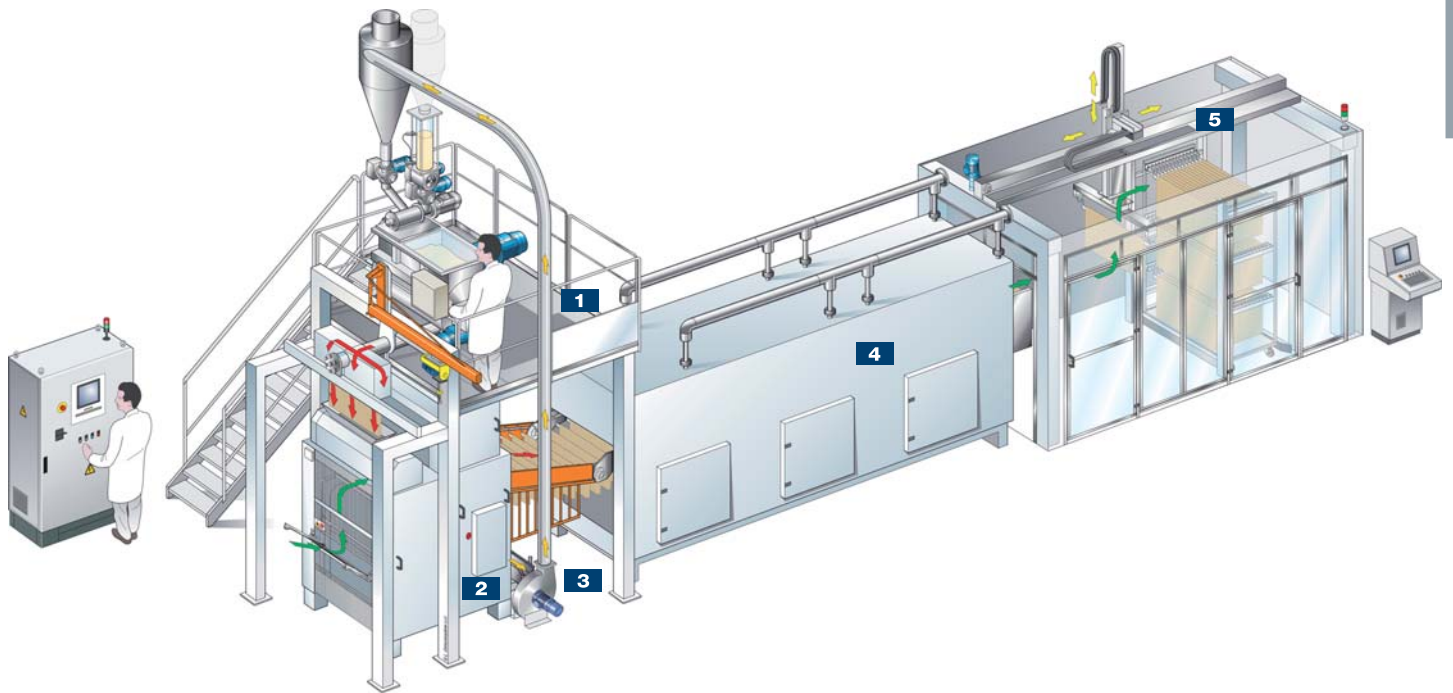

- 1** pressa con testata lineare
- 2** stenditrice STE-1120/1500
- 3** gruppo recupero sfridi freschi
- 4** LONGDRYER di pre-incarto pasta lunga
- 5** OMNIROBO per carico automatico carrelli pasta lunga

- 1** press with linear head
- 2** spreader unit STE-1120/1500
- 3** fresh pasta trim return unit
- 4** LONGDRYER long-cut pasta pre-drying machine
- 5** OMNIROBO for the automatic loading of long-cut pasta trolleys